




**CLEARMIRROR®**  
THE DIFFERENCE IS CLEAR

## 18"X18" SHOWERLITE

16104-1818 -3K OR 5K

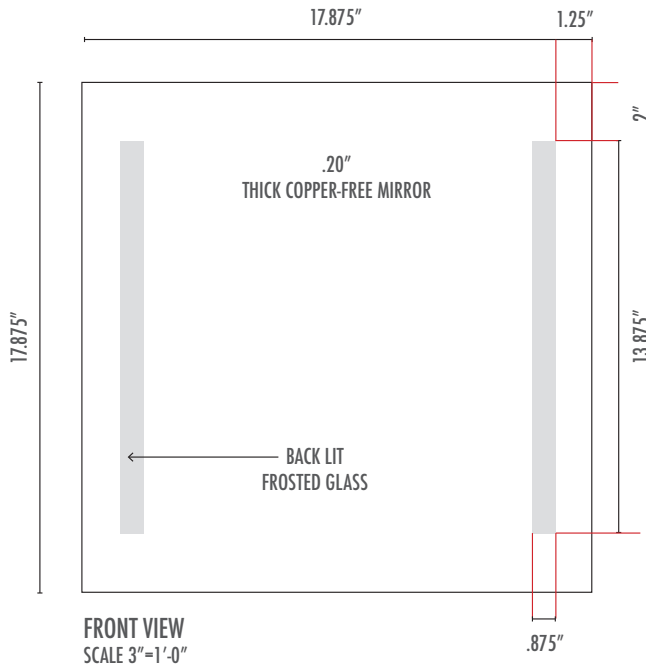

### SPECIFICATIONS

- Copper-free, corrosion resistant mirror.
- Tolerance:  $\pm 0.0625"$
- Mirror must mount flush with tile or surround.
- UL Listed for use in showers.
- Transformer located in remote/accessible area.
- LED Panels: 3000 or 5000 Kelvin / 95 CRI.
- LED Panels: Rated for 70,000 hours.
- Electrical: 24 Volt DC / 47 Watt.

